

(VOLTAGE CONTROLLED) TEMP. COMPENSATED OSCILLATOR SPECIFICATION

General Information

Product Type: TCXO=TX, VCTCXO=VX
 Package Type: **ETXC**
 Part No.: Freq.-Series-EZT & datecode

Electrical Specifications

Frequency: 2~50MHz
 Supply Voltage: 3.3V / 5.0V
 Load: TTL2 / 10KOhm//10pF
 Operation Temp.: Up to -40°C to +85°C
 Frequency Stability over Temp.: ±1.0~3.0 ppm max
 Frequency Stability vs.Volt: ±0.1~0.5 ppm max
 Frequency Stability vs.Load: ±0.1~0.2 ppm max
 Aging: ±1.0/First year
 Tolerance@25C: ±0.3~0.5 ppm max
 Output Level: TTL, HCMOS / 1.0
 Output Waveform: Rectangular, Clipped sine wave
 Supply Current: 20.0, 2.0mA Max
 Frequency adjustment: ±3.0ppm Min(by internal trimmer)
 Frequency Deviation(VX) ±0.5~20ppm
 Control voltage(Vcon): 1.65±1.5V, 2.5V±2.0V


Package Dimensions

L x W x H
 18.5 x 11.9 x 9.2mm

Marking

Line 1 Frequency
 Line 2 Series
 Line 3 EZT & date code

20.000
ETXC
EZT 401

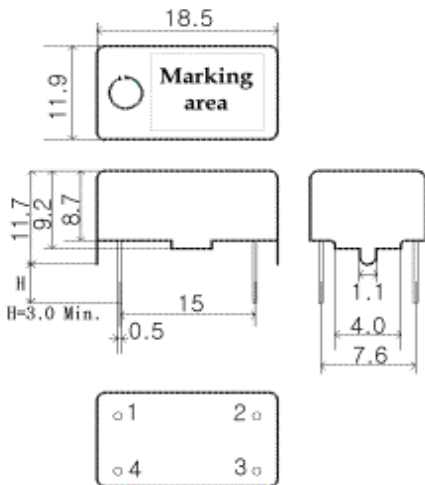

Pin	C1	C2	C6
1	NC(TX), Vcon(VX)		
2	GND		
3	Output		
4	Vcc		

EZTeck	
Room#502, V-Charmant Building, 1601-1 Secho-Dong, Seocho-Gu, Seoul, Korea Phone : +82 2 582 1982 Fax : +82 2 582 1984	
DWG. No.: ETXC-04	REV.:
DATE:	BY: Richard Lee
PAGE: 1 of 1	APPROVAL: