

## MICROPROCESSOR CRYSTAL SPECIFICATION

### General Information

Product Type:	UM-5
Package Type:	<b>EZXTU5</b>
Part No.:	Freq.-Series-EZT & datecode

### Electrical Specifications

Frequency:	10.000MHz to 180.000MHz
Calibration Frequency Tolerance:	±10ppm ~ ±50ppm @ 25°C
Frequency Stability over Temp.:	±10ppm ~ ±50ppm
Operating Temperature:	0~+70°C, -40~+85°C, -55~+125°C(Option)
Storage Temperature:	-55°C ~ +125°C
Load Capacitance:	10 TO 32pF OR Series
Shunt Capacitance:	7pF Max
Equivalent Series Resistance:	30~100 Ohms Max
Drive Level:	50uW Typical, 1mW Max
Aging:	± 5.0ppm per year Max


### Package Dimensions

L x W x H  
7.80 x 3.10 x 5.80mm

### Marking

Line 1 Frequency  
Line 2 Series  
Line 3 EZT & datecode

31.250
EZTU5
EZT 401

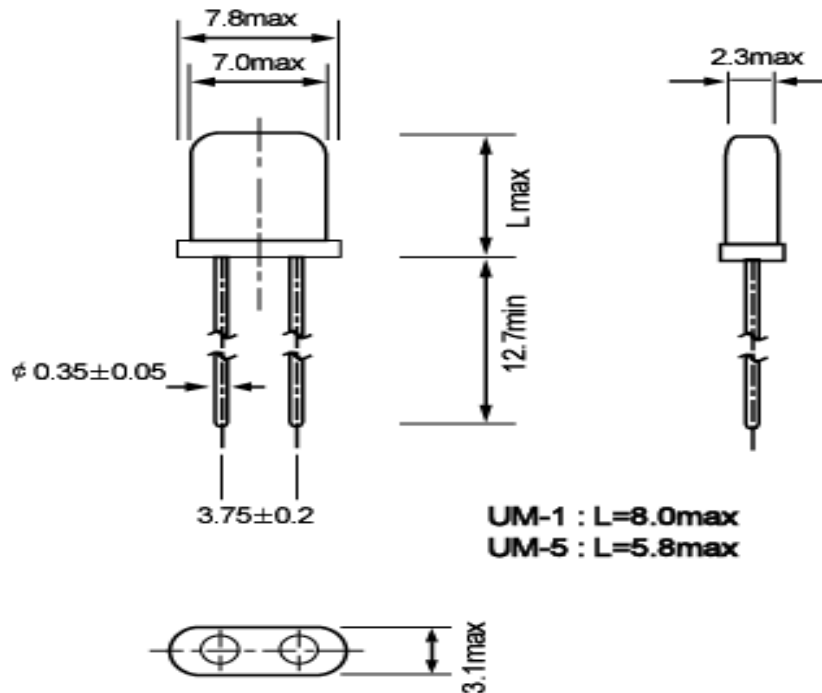

### EZTeck

Room#502, V-Charmant Building, 1601-1  
Seocho-Dong, Seocho-Gu, Seoul, Korea  
Phone : +82 2 582 1982 Fax : +82 2 582 1984

DWG. No.: EZTU5-04

REV.:

DATE:

BY: Richard Lee

PAGE: 1 of 1

APPROVAL: