

VOLTAGE CONTROLLED CRYSTAL OSCILLATOR SPECIFICATION

General Information


Product Type: 5.0V VCXO(14PIN DIP)
 Package Type: **EZVF5**
 Part No.: Freq.-Series-EZT & datecode

Electrical Specifications

Frequency: 1.000~160.000MHz
 Calibration Frequency Tolerance: $\pm 20\text{ppm} \sim \pm 50\text{ppm}$ @ 25°C
 Frequency Stability over Temp.: $\pm 20\text{ppm}$, $\pm 25\text{ppm}$, $\pm 50\text{ppm}$
 Operating Temperature: 0~+70°C, -40~+85°C(option)
 Storage Temperature: -55°C ~ +125°C
 Supply Voltage(Vdd): +5.0Vdc $\pm 0.5\text{Vdc}$
 Supply Current: 30mA max@1.0~99.9MHz
 50mA max@100.0~160.0MHz
 Symmetry (Duty Cycle): 40/60% Std., 45/55% Available
 Output "O" Level: 0.4Vdc max (TTL), 0.5 Vdc max (HCMOS)
 Output "1" Level: 2.4 Vdc min (TTL), 4.5 Vdc min (HCMOS)
 Rise & Fall Time: 10nS max < 5nS typical
 Linearity: $\pm 20\%$ max Std., $\pm 10\%$ Available
 Output Load: 10TTL/15pF HCMOS
 Pullability: ± 100 to ± 150 typ, ± 75 to $\pm 300\text{ppm}$ option
 Control Voltage: 2.5V $\pm 2.0\text{V}$
 Aging: $\pm 3.0\text{ppm}$ per year

Package Dimensions

L x W x H
 20.8 x 13.2 x 7.6mm

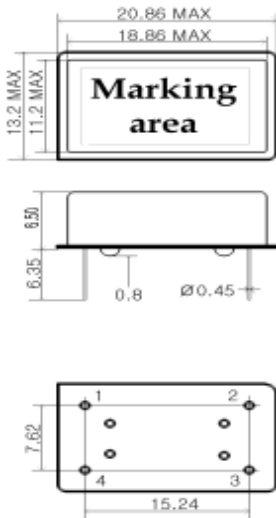

Marking

Line 1 Frequency
 Line 2 Series
 Line 3 EZT & datecode

74.250
EZVF5
EZT 401

Pin	Function
1	Vcon
2	GND
3	OUTPUT
4	Vdd

EZTeck	
Room#502, V-Charmant Building, 1601-1 Seocho-Dong, Seocho-Gu, Seoul, Korea Phone : +82 2 582 1982 Fax : +82 2 582 1984	
DWG. No.: EZVF5-04	REV.:
DATE:	BY: Richard Lee
PAGE: 1 of 1	APPROVAL: